



**Safe and approved storage of aggressive, non flammable hazardous materials in working areas**

## Function / construction:

- **robust construction and longevity:** cabinet body made of powder-coated sheet steel, safety elements assembled outside the storage compartment for increased protection against corrosion
- **two in one:** two hermetically separated storage compartments allow the isolated storage of acids and bases in one cabinet
- **no unauthorised use:** doors lockable with profile cylinder (integration in an existing locking system possible)

- **easy alignment:** adjusting aids to compensate for uneven floor
- **ventilation:** integrated metal-free air ducts ready for connection to a technical exhaust system with only one extraction air inlet

## Available equipment

- shelf with plastic sump (V=33 ltr.) and grid
- bottom collecting sump PE (V=66 ltr.) with grid
- pull-out shelves with removable plastic sump

## Cabinet for acids and alkalis SL-CLASSIC model SL.196.120.MV

in Light grey (RAL 7035), interior equipment with 12 x pull-out shelf (panel/PP)

Order No. 30606-001-30608 4



## Quickly put into operation

Integrated air ducts ready for connection (DN 75) to a technical exhaust system



## Pull-out shelf

Sturdy construction with removable plastic sump



## Adjusting aids

To compensate for uneven floor and an easy alignment




## Extraction unit

Safe ventilation of safety storage cabinets

plug-in – fast and easy to install


Further information and products from page 397

Order No. 14218 2

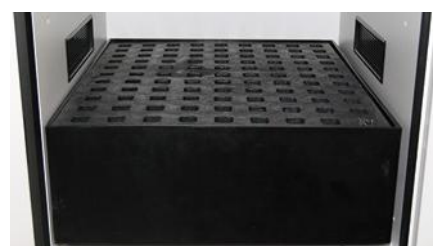

## Bottom collecting sump

For the storage of bulk containers, available as fixed storage level with plastic sump (V=33 ltr.) or bottom collecting sump (V=66 ltr.)

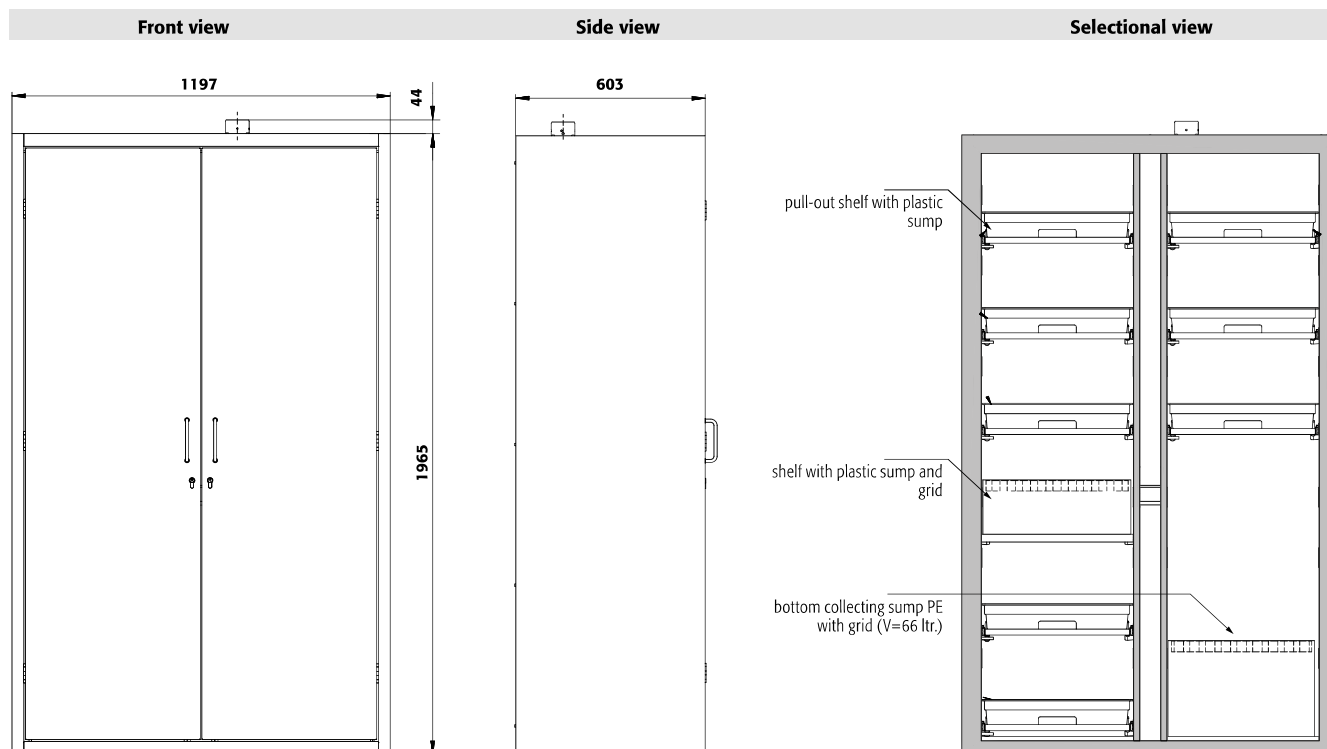


SL-LINE

## Technical data

## SL.196.120.MV

External dimensions W x D x H	mm	1197 x 603 x 1965
Internal dimensions W x D x H	mm	all compartments: 485 x 570 x 1869
Weight without interior equip.	kg	160
Extraction air	DN	75
Air change <b>30 times</b>	m <sup>3</sup> /h	16
Diff. pressure (air change <b>30 times</b> )	Pa	56
Distributed load	kg/m <sup>2</sup>	240
Maximum load	kg	300

## Top view

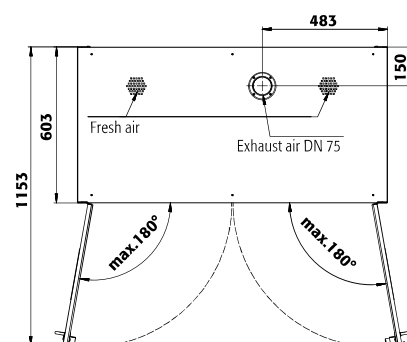

## Order example - how to order correctly



30606



001



30607



## Model

SL.196.120.MV

## Information / equipment

without interior equipment, with vertical dividing wall

## Order No.

30606



## Body colour

Light grey RAL 7035

## Door colour

Light grey RAL 7035

## Order No.

001 4



## Interior equipment packages (can only be ordered in combination with the cabinet)

left: 4x pull-out shelf (V=11.0L)  
 right: 4x pull-out shelf (V=11.0L)  
 left: 6x pull-out shelf (V=11.0L)  
 right: 6x pull-out shelf (V=11.0L)

## Material

panel/PP

## Order No.

30607 2

panel/PP

30608 2



## Interior equipment

pull-out shelf, with PP sump  
 collecting sump, on shelf with grid  
 collecting sump, with grid

## Material

panel/PP grey

polyethylene

polyethylene

## W x D x H (mm)

407 x 468 x 80\*

459 x 555 x 167\*

454 x 538 x 314\*



1)



2)



3)

## Order No.

30609 2

30610 2

30611 4



## Accessories

extraction unit without exhaust air monitoring

## Order No.

14218 2

\* usable storage space W x D (mm)

1) load capacity (kg), 2) retention capacity (ltd), 3) maximum container volume in the cabinet (ltr)